
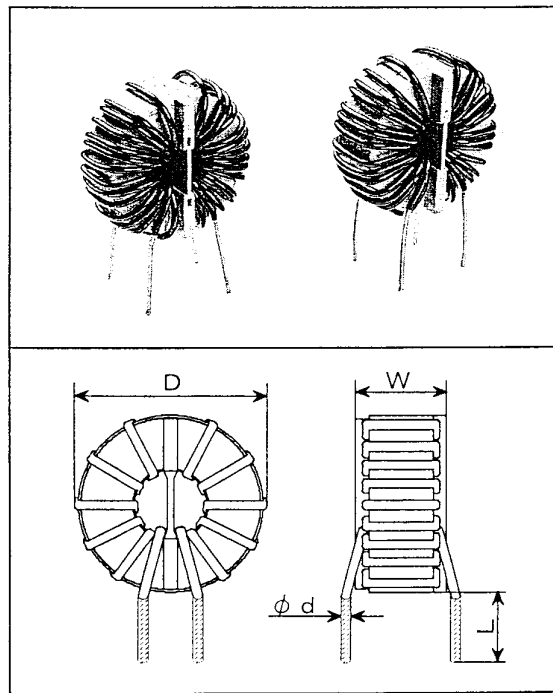


- 特長** 高透磁率コアを使用
 小型で大インダクタンス
 優れた周波数特性
- 用途** 電子機器のコモンモードノイズ防止
- 仕様** 定格電圧：AC/DC 250V
 使用温度範囲：-25~+120℃
 絶縁耐圧：巻線間にAC 2KV
 /1分間、又はAC
 2.4KV/1~2
 秒間印加
 絶縁抵抗：巻線間にDC 500
 V印加後、100M
 Ω以上

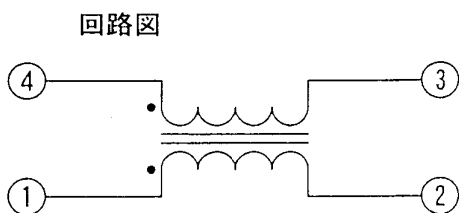

品名	定格電流 (A)	インダクタンス (mH)min	直流抵抗 (mΩ)max	仕上り寸法 (mm)			
				D max	w max	L max	φ d
TC-1916-0105D	1.0	5.0	250	19.0	16.0	15.0	0.35
TC-1916-0108D	1.0	8.0	325	19.0	16.0	15.0	0.35
TC-1916-0110D	1.0	10.0	350	19.0	16.0	15.0	0.35
TC-1916-0115D	1.0	15.0	400	19.0	16.0	15.0	0.35
TC-1916-0202D	2.0	2.0	85	19.0	16.0	15.0	0.50
TC-1916-0301D	3.0	1.0	45	19.0	16.0	15.0	0.60
TC-2520-0203D	2.0	3.0	110	25.0	20.0	15.0	0.60
TC-2520-0208D	2.0	8.0	150	25.0	20.0	15.0	0.55
TC-2520-0303D	3.0	3.0	100	25.0	20.0	15.0	0.65
TC-2520-0501D	5.0	1.0	50	25.0	20.0	15.0	0.80
TC-2520-0502D	5.0	2.0	90	25.0	20.0	15.0	0.80
TC-2520-0601D	6.0	1.0	30	25.0	20.0	15.0	0.90
TC-3423-0408D	4.0	8.0	90	34.0	23.0	15.0	0.80
TC-3423-0502D	5.0	2.0	50	34.0	23.0	15.0	0.80
TC-3423-0505D	5.0	5.0	80	34.0	23.0	15.0	0.80
TC-3523-0510D	5.0	10.0	100	35.0	23.0	15.0	0.90
TC-3523-1001D	10.0	1.0	30	35.0	23.0	15.0	1.30
TC-3523-1501D	15.0	1.0	20	35.0	23.0	15.0	1.50
TC-3523-20R5D	20.0	0.5	10	35.0	23.0	15.0	1.80
TC-5334-0610D	6.0	10.0	60	53.0	34.0	15.0	1.20
TC-5334-1002D	10.0	2.0	90	53.0	34.0	15.0	1.30
TC-5334-1003D	10.0	3.0	50	53.0	34.0	15.0	1.30
TC-5435-1502D	15.0	2.0	70	54.0	35.0	15.0	1.80